


SOLAR'S MOST TRUSTED



REC ALPHA[®] PRO M

DATASHEET

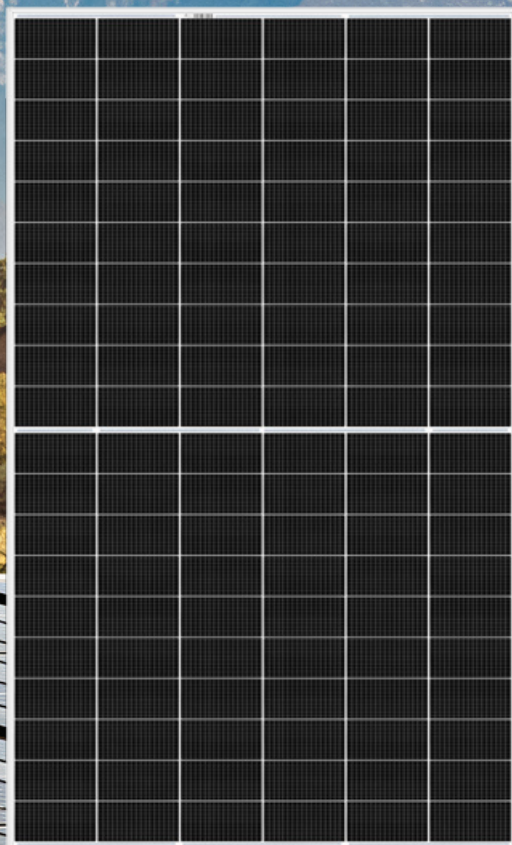

600 - 640W
HETEROJUNCTION
TECHNOLOGY

225 W/M² POWER DENSITY
>92% POWER IN YEAR 25
-0.24%/°C TEMPERATURE
COEFFICIENT OF P_{MAX}



ELIGIBLE

Measurements in mm [in]

1400 [55.1]
 400 [15.75]
 500 [19.7]
 387.5 ± 1 [15.25 ± 0.04]
 2175 ± 2.5 [85.6 ± 0.1]
 32 [1.25]
 1300 [51.2]
 208.4 [8.2]
 5.5 ± 0.2 [0.2 ± 0.01]
 1395 ± 2.5 [54.4 ± 0.1]
 1263 [49.7]
 14 ± 0.2 [0.5 ± 0.01]
 9 ± 0.2 [0.35 ± 0.01]
 21 ± 0.2 [0.8 ± 0.02]
 45 [1.8]
 22.5 [0.9]
 792 ± 3 [31.2 ± 0.1]
 30 [1]

